


Nextronics



PRODUCT CATALOGUE



Customer Care : +91-8750-100-700

www.nextronics.in

Company Profile

Welcome to Nextronics, a Leading Brand in Hospitality Products, Hotels and Smart Locks Segment.....

We offer Smart locks, hotel locks, Hospitality Appliances and accessories with goal and objective to provide innovative solutions and latest technology for the commercial and residential market and bring the world's finest luxury product to you at the lowest price possible. Our Air Purifiers are at its best, you can rely upon...

The main products of Nextronics are Hotel locks, Smart Locks and Air purifiers, which are widely applied in homes, hospitals, hotels, stores and other public places. With our Air purifiers, indoor air quality will be greatly improved, preventing you from various pollutants in daily life.

We always concentrate the high quality with the aim to make life better by constantly developing good technology, new techniques and materials to further enhance our products offering. Our Products and services are reliable and reasonable that improve productivity, convenience and lower costs.

Nextronics products and solutions are internationally certified and approved.



HL100 Series

SPLIT LOCK



HL-100-GG Bright Golden

SPLIT HOTEL LOCK

PURE 304# STAINLESS STEEL MATERIAL
DIE CASTING 304# MORTISE LATCH AND DEADBOLT
HIDDEN CYLINDER ENSURE THE SECURITY
IMPORTED PC MATERIAL FOR THE READER
FREE TO CHANGE TO DIFFERENT HANDLES

Specifications:

Classical Hotel Door Lock
Card Operated Electronic Lock (RFID)
USER-FRIENDLY, SIMPLE TO INSTALL AND USE
2 YEAR WARRANTY
STANDARD FINISHES: SILVER & PVD GOLDEN

CARD LOCK

(RF) MIFARE CARD LOCK SYSTEM

PHYSICAL CONTACT: No
MAINTENANCE: No need
LIMITING: Time and date can be limited
LOW ENERGY
Lightened with voice alarm and 200 times opening
SECURITY CODE SYSTEM: 3 level
TIME CONTROL: Real-time with PHILIPS CHIP
CARD TECHNOLOGY
MIFARE 1 card for closing and energy saving
CARD STANDARD: ISO14443 (RFID) Type-A
CARD READING SPEED: less than 0.5 Sec
OPENING & CLOSING LOCK: with Micro Electric Motor
WORKING TEMP.: -10 ~ 55°C
HUMIDITY RATE: 15~85 % RH
ENERGY: DC 4.8 V - 6.5 V; 4 Pcs 1.5 V LR6 Alkaline battery
POWER: Static: <25 uA Dynamic: < 150 uA
BATTERY LIFE: upto 1 Year
WEIGHT: 2.3 kg
DOOR THICKNESS: Between 35mm to 65 mm
DOOR WIDTH: Min. 105 mm
AUDIT TRAIL: Latest 990 events
ALARM Function: low battery indicator & non-closed door
PASSAGE MODE: Available



HL-100-GG Bright Golden



HL-100-CR Satin Finish

HL180 Series

SPLIT LOCK



SPLIT HOTEL LOCK

PURE 304# STAINLESS STEEL MATERIAL
CNC MADE READER COVER WITH MIRROR FINISH
IMPORTED LEATHER HANDLE WITH SOLID STRUCTURE
DIE CASTING 304# MORTISE LATCH AND DEADBOLT
HIDDEN CYLINDER ENSURE THE SECURITY
IMPORTED PC MATERIAL FOR THE READER
FREE TO CHANGE TO DIFFERENT HANDLES

HL180-SS Stainless Steel+Leather



HL180-CR Mirror Finish



HL180-SS Stainless Steel
+Leather

CARD LOCK

(RF) MIFARE CARD LOCK SYSTEM

PHYSICAL CONTACT: No

MAINTENANCE: No need

LIMITING: Time and date can be limited

LOW ENERGY

Lightened with voice alarm and 200 times opening

SECURITY CODE SYSTEM: 3 level

TIME CONTROL: Real-time with PHILIPS CHIP

CARD TECHNOLOGY

MIFARE 1 card for closing and energy saving

CARD STANDARD: ISO14443 (RFID) Type-A

CARD READING SPEED: less than 0.5 Sec

OPENING & CLOSING LOCK: with Micro Electric Motor

WORKING TEMP.: -10 ~ 55°C

HUMIDITY RATE: 15~85 % RH

ENERGY: DC 4.8 V - 6.5 V; 4 Pcs 1.5 V LR6 Alkaline battery

POWER: Static: <25 uA Dynamic: < 150 uA

BATTERY LIFE: upto 1 Year

WEIGHT: 2.3 kg

DOOR THICKNESS: Between 35mm to 65 mm

DOOR WIDTH: Min. 105 mm

AUDIT TRAIL: Latest 990 events

ALARM Function: low battery indicator & non-closed door

PASSAGE MODE: Available

HL200 Series

Slim Electronic Lock



HL200-GG PVD Golden



HL200-SS Satin Finish

CARD LOCK

(RF) MIFARE CARD LOCK SYSTEM

PHYSICAL CONTACT: No

MAINTENANCE: No need

LIMITING: Time and date can be limited

LOW ENERGY

Lightened with voice alarm and 200 times opening

SECURITY CODE SYSTEM: 3 level

TIME CONTROL: Real-time with PHILIPS CHIP

CARD TECHNOLOGY

MIFARE 1 card for closing and energy saving

CARD STANDARD: ISO14443 (RFID) Type-A

CARD READING SPEED: less than 0.5 Sec

OPENING & CLOSING LOCK: with Micro Electric Motor

WORKING TEMP.: -10 ~ 55°C

HUMIDITY RATE: 15~85 % RH

ENERGY: DC 4.8 V - 6.5 V; 4 Pcs 1.5 V LR6 Alkaline battery

POWER: Static: <25 uA Dynamic: < 150 uA

BATTERY LIFE: upto 1 Year

WEIGHT: 3.0 kg

DOOR THICKNESS: Between 35mm to 65 mm

DOOR WIDTH: Min. 105 mm

AUDIT TRAIL: Latest 990 events

ALARM Function: low battery indicator & non-closed door

PASSAGE MODE: Available

HL280 Series

Classic Hotel Lock (RFID)



CARD LOCK

(RF) MIFARE CARD LOCK SYSTEM

PHYSICAL CONTACT: No

MAINTENANCE: No need

LIMITING: Time and date can be limited

LOW ENERGY

Lightened with voice alarm and 200 times opening

SECURITY CODE SYSTEM: 3 level

TIME CONTROL: Real-time with PHILIPS CHIP

CARD TECHNOLOGY

MIFARE 1 card for closing and energy saving

CARD STANDARD: ISO14443 (RFID) Type-A

CARD READING SPEED: less than 0.5 Sec

OPENING & CLOSING LOCK: with Micro Electric Motor

WORKING TEMP.: -10 ~ 55°C

HUMIDITY RATE: 15~85 % RH

ENERGY: DC 4.8 V - 6.5 V; 4 Pcs 1.5 V LR6 Alkaline battery

POWER: Static: <25 uA Dynamic: < 150 uA

BATTERY LIFE: upto 1 Year

WEIGHT: 3.0 kg

DOOR THICKNESS: Between 35mm to 65 mm

DOOR WIDTH: Min. 105 mm

AUDIT TRAIL: Latest 990 events

ALARM Function: low battery indicator & non-closed door

PASSAGE MODE: Available



HL280-GG PVD Golden HL280-SS Satin Finish

HL300 Series

Classic Hotel Lock (RFID)



CARD LOCK

(RF) MIFARE CARD LOCK SYSTEM

PHYSICAL CONTACT: No

MAINTENANCE: No need

LIMITING: Time and date can be limited

LOW ENERGY

Lightened with voice alarm and 200 times opening

SECURITY CODE SYSTEM: 3 level

TIME CONTROL: Real-time with PHILIPS CHIP

CARD TECHNOLOGY

MIFARE 1 card for closing and energy saving

CARD STANDARD: ISO14443 (RFID) Type-A

CARD READING SPEED: less than 0.5 Sec

OPENING & CLOSING LOCK: with Micro Electric Motor

WORKING TEM.: -10 ~ 55°C

HUMIDITY RATE: 15~85 % RH

ENERGY: DC 4.8 V - 6.5 V; 4 Pcs 1.5 V LR6 Alkaline battery

POWER: Static:<25 uA Dynamic:< 150 uA

BATTERY LIFE: upto 1 Year

WEIGHT: 3.0 kg

DOOR THICKNESS: Between 35mm to 65 mm

DOOR WIDTH: Min. 105 mm

AUDIT TRAIL: Latest 990 events

ALARM Function: low battery indicator & non-closed door

PASSAGE MODE: Available



HL300-GG PVD Golden HL300-SS Satin Finish

HL500 Series

Luxury Hotel Lock

PROXIMITY ELECTRONIC LOCK

HIGH CLASS HOTEL LOCK

#5 ZINC ALLOY MATERIAL, WITH 100 HOURS SALTY FROG TEST

STRONG HANDLE FOR WHOLE DOOR LOCKS

4MM THICK ACRYLIC PANEL. ENSURE THE SECURITY USE

HIDDEN CYLINDER COVER, GOOD FOR HOTEL USE UNDER EMERGENCY CONDITION

OFFLINE SYSTEM FOR MANAGEMENT



CARD LOCK

(RF) MIFARE CARD LOCK SYSTEM

PHYSICAL CONTACT: No

MAINTENANCE: No need

LIMITING: Time and date can be limited

LOW ENERGY

Lightened with voice alarm and 200 times opening

SECURITY CODE SYSTEM: 3 level

TIME CONTROL: Real-time with PHILIPS CHIP

CARD TECHNOLOGY

MIFARE 1 card for closing and energy saving

CARD STANDARD: ISO14443 (RFID) Type-A

CARD READING SPEED: less than 0.5 Sec

OPENING & CLOSING LOCK: with Micro Electric Motor

WORKING TEMP.: -10 ~ 55°C

HUMIDITY RATE: 15~85 % RH

ENERGY: DC 4.8 V - 6.5 V; 4 Pcs 1.5 V LR6 Alkaline battery

POWER: Static:<25 uA Dynamic:< 150 uA

BATTERY LIFE: upto 1 Year

WEIGHT: 2.3 kg

DOOR THICKNESS: Between 35mm to 65 mm

DOOR WIDTH: Min. 105 mm

AUDIT TRAIL: Latest 990 events

ALARM Function: low battery indicator & non-closed door

PASSAGE MODE: Available



HL-500-GG PVD Golden



HL-500-CR Bright Chrome

HOTEL LOCK SYSTEM



Computer: Memory: 500GB above, hard disk suggested 2GB above, USB port required.

Software: Windows system, Windows 7/8/10.

Database: Windows Access / Microsoft SQL server 2008 above.

Encoder: Read/write card and software registration.

Door Lock: Installed on each room.

LCD Handset: Configure room number, adjust time, audit trail records etc.

RF Card: Unlock the door lock.

Printer: as per request from the site.

LOCK SYSTEM ACCESSORIES

MCE02-17 CARD ENCODER

Technical Parameter

- Working voltage: DC5V
- Rated current: 500mA
- Working humidity: RH 10%~90%
- Working temperature: -20°C~55°C
- Reading speed: <1 Sec
- Detect type: auto check

Specification

- Universal USB port, no need of an extra driver.
- Auto detect the card.
- Fast reading speed and stable to use
- Support one card system integration

PHD01-16 LCD HANDSET

Technical Parameter

- Working voltage: DC3V
- Static current: <10uA
- Working current: <100mA
- Storage humidity: RH 5%~95%
- Working temperature: -25~70°C:
- Reading speed: <1 Sec
- Size: 177.6 x 85 x 30mm

Specification

- One station solution, no need of special room setting
- Fast and correct time adjustment
- Special system checking for hardware and firmware
- Easy to check the card information
- Convenient to check audit trial records
- Support checkout function.

Energy Saving Switch



THE ENERGY SAVER IS SPECIALLY DESIGNED TO BE USED AS POWER SWITCH IN THE HOTELS, HOME, OFFICE, PUBS, ETC. AND SUITABLE FOR MIFARE /RF CARD TO CONTROL THE POWER WITH HIGH SECURITY. IT CAN SAVE ABOUT 40% POWER CONSUMPTION IN YOUR DAILY USE.

USE METHOD: YOU CAN INSERT ONE CARD INTO THE SWITCH TO GET THE POWER, THE SIGNAL LIGHT WILL SHOW RED. UPON DRAWING OUT THE CARD, THE POWER WILL BE OFF AFTER 15 SECONDS.

SPECIAL FUNCTIONS: WE OFFER THE SPECIAL SAVERS THAT ONLY ACCEPT THE RIGHT ROOM KEYCARD. SUCH AS IN 101 ROOM, ROOM KEY CARD FROM 102 WILL NOT WORK ON 101 SWITCH



INTRODUCTION

1. INTELLIGENT ENERGY SAVER MODEL: ES-40E

INSERT THE RF CARD TO THE SAVER AND POWER ON THE DEVICE INSIDE THE ROOM, IT IS SIMPLE TO INSTALL THE SAVER AND CONNECT THE CABLE WITH THE INPUT/OUTPUT/NULL POLE. IT IS SAFE AND CONVENIENT TO USE WITH THE HIGH PERFORMANCE RELAY.

2. ROOM NUMBER TYPE ENERGY SAVER MODEL: ES-40S

ONLY THE RIGHT ROOM CARD CAN BE USED ON THE SAVER FOR POWER. IT IS SIMPLE TO INSTALL THE SAVER AND CONNECT THE CABLE WITH THE INPUT/OUTPUT/NULL POLE.

Elevator Control



MODEL: EL01-16

INTRODUCTION

- LONG READING DISTANCE (0-30MM)
- SUPPORT HOTEL GUEST CARD, NO NEED OF AN EXTRA SOFTWARE
- THREE MODE: FREE MODE, FLOOR MODE AND FLOOR + TIME MODE
- DIRECT FUNCTION: TOUCH CARD AND REACH TO THE FLOOR DIRECTLY
- SUPPORT AUDIT TRIAL FUNCTION: 2000 RECORDS MAXIMUM
- FULLY COMPATIBLE WITH THE HOTEL LOCKING SOFTWARE
- STAINLESS STEEL READER WITH RUBBER GASKET



Wall Reader



MODEL: WR02

INTRODUCTION

SUPPORT THE HOTEL SYSTEM CARD

READING DISTANCE : 0-3CM

NO NEED OF EXTRA SOFTWARE, EASY TO USE


AVAILABLE TO CONTROL THE ELECTRIC DROP BOLT OR
ELECTROMAGNET LOCK OR ELEVATOR FLOOR BUTTON

SUPPORT 8 26 OUTPUT SIGNAL.

STAINLESS STEEL READER WITH RUBBER GASKET TO PREVENT
THE DUST OR WATER

Smart Lock

YOU CAN NOW HAVE YOUR DOOR LOCKED-UNLOCKED WITH YOUR FINGER PRINT WITH THE HELP OF BIOMETRIC ENGINEERING. NEXTRONICS HAS A VISION TO INTRODUCE DIGITAL AND BIOMETRIC DOOR LOCKING TO THE INDIAN MARKET WITH MULTIPLE WAYS OF OPENING, FINGER, PASSWORD, MECHANICAL KEY & CARD (OPTIONAL).

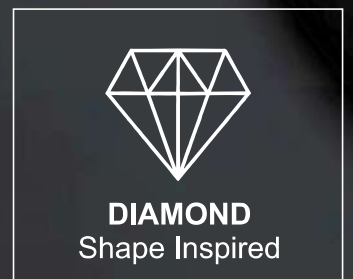



Free Hand Design


Free handle: handle can lift down but can't open the door after locked which can protect the log effectively not destroyed by violence

Privacy Protection Function

Protect user security and improve the safety performance.


Can Store 9 Groups Master Users & 291 Groups Normal Users

If privacy switch is active, only master user can open it from outside.

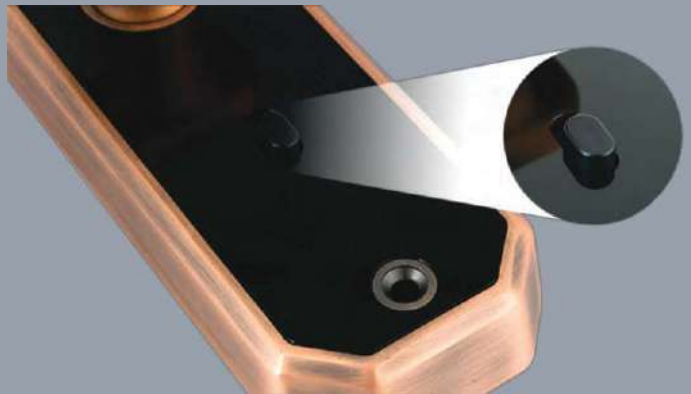

Full Screen Touch is Simple

Get rid of cumbersome operation, easy to press, the old & children can also be convenient and practical.

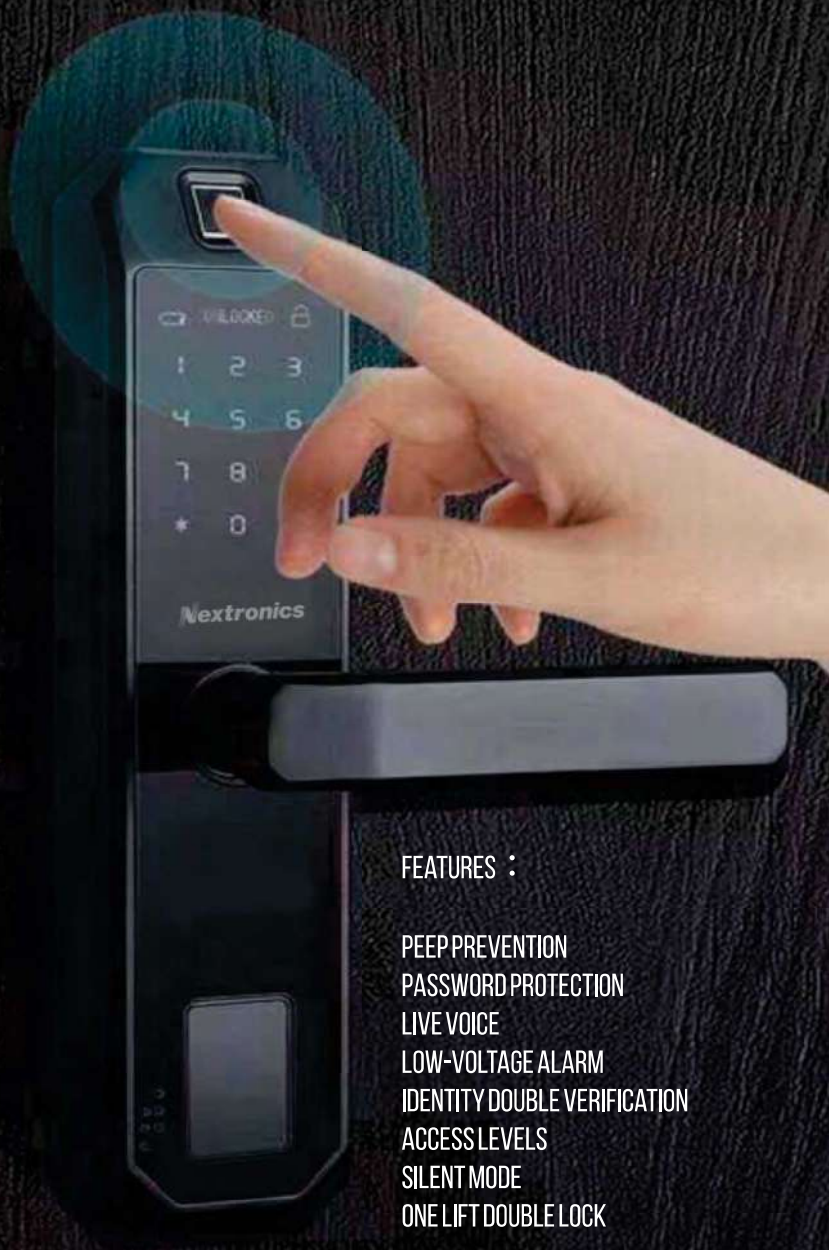

Model	SL-300	Material	Zinc Alloy	Capacity (Fingerprint / Password /ID card)	9 groups master user, 291 groups normal user
Size(mm)	230*55	Size of Front Plate	230*55*20 mm	Password Combination	6
Optional color	Black/Grey/Red bronze/Champaign gold	Optional Lock Body	5072 or 3585	Type of FPG	Semi-conductor
Unlock way	Fingerprint/ Password /Key/ID card(Optional)	Opening Direction	Reversible	Battery	4 PCS AAA alkaline batteries
Cylinder	super c-class cylinder	Language Support	English	Power Supply	USB interface
OLEDScreen	NO	Suitable Door Thickness	35-90mm	Suitable Door	Wood door, metal door, Anti-theft door
Working Temperature	-10°C to 60°C	Working Humidity	20% - 93%	Operating Voltage	4.5V - 6.5V

Double Body Electric Kettle



1.2 Ltrs



N1206 Black



N1206 Ivory




N1206 Golden



N1206 Silver



#304 S/S



Opening
Button



Double body
(Anti-scald)



1000 Watts



Strix Controller

Tray Sets



J-series

100% melamine with ceramic luster surface can effectively maintain the cleaning of bar surface, prevent the furniture from water invasion.

CCC CE CB SASO Rohs



Model : J-N1205



Model : J-N1206 Black



Model : J-N1206 Silver

K-series

1. Original patented design, combined the kettle base and tray two in one, more concise and elegant.
2. Stainless steel water filters and reservoirs to collect overflow water to avoid the huge loss of furniture and wallpaper erosion caused by overflow tea.
3. ABS materials and imitation wood grain design, shatter & scratch resistant, free of Fingerprints.

CCC CE CB SASO Rohs



Model : K-N1208 Gun



Model : K-N1208

Semi Conductor Mini Bar



inside view

NM - 30A



NM - 30G

Capacity	: 30L
	: 220V-240V, 50Hz/60Hz, 48W
Temp. Range	: 5-15°C
Product size	: L420xW400xH485mm
Ctn size	: L482xW449xH546mm
N.W.	: 9.5KG/11KG

Unique thermoelectric cooling with single / double chips,
low noise, No Vibration, soft interior light



NM - 42A



NM - 42G

Capacity	: 42L
	: 220V-240V, 50Hz/60Hz, 48W
Temp. Range	: 5-15°C
Product size	: L420xW420xH515mm
Ctn size	: L470xW460xH550mm
N.W.	: 10.3KG/12.3KG

Adsorption Mini Bar

No compressor - No noise, No freon, environmental friendly,
No mechanical movement, Long endurance, Energy saving by
thermostat from 0°C to 8°C, Intelligent automatic defrosting,
with interior LED lamp design, Reversible door with adjustable
retainers, Door Lock is available on request



NX - 30B



NX - 40A



NX - 60A



Capacity	: 30L
	: 220V-240V, 50Hz/60Hz, 48W
Type	: 3 layer glass door
Temp. Range	: 5-12°C
Product size	: L423xW394xH462mm
Ctn size	: L480xW546xH470mm
N.W.	: 16.1KG/18.2KG


Capacity	: 40L
	: 220V-240V, 50Hz/60Hz, 48W
Type	: Solid Door
Temp. Range	: 0-8°C
Product size	: L440xW400xH550mm
Ctn size	: L480xW546xH570mm
N.W.	: 16.5KG/18.6KG

Capacity	: 60L
	: 220V-240V, 50Hz/60Hz, 80W
Type	: Solid Door
Temp. Range	: 0-8°C
Product size	: L517xW485xH560mm
Ctn size	: L580xW550xH630mm
N.W.	: 18.5KG/20.5KG



2000W

Model : HS-01
Product size:29.8x11.9x14.1cm
Plate size:23x11.9cm
Water tank:350ml
220-240v, 50-60Hz, 2000W



1800W

Model : HS-03
Product size:28x11.8x14cm
Plate size:23.9x11.8cm
Water tank:340ml
220-240v, 50-60Hz, 1800W



1600W

Model : HS-04
Product size:24.6x12x12.7cm
Plate size:19.5x12cm
Water tank:260ml
220-240v, 50-60Hz, 1600W




Anti-theft Series Ironing Station | Hanging into hotel wardrobe |



Anti-drip Series Ironing Station | Hanging into hotel wardrobe |



Rotatable iron holder



Stores Neatly on Rail



Anti-Theft Cable lock



Rotatable Iron Holster



Stores Neatly on Rail



Anti-drip Cable lock



Hotel Safe



Model : C2042
Size : 420*370*200mm



Model : E2042A
Size : 420*370*200mm



Model : E2042V
Size : 420*370*200mm



Model : E2042N
Size : 420*370*200mm



Model : E2042H
Size : 420*370*200mm



Model : E2042M
Size : 420*370*200mm



Hair Dryers



HR-201A



Material:	Plastic, ABS Plastic
Nozzle Type:	Diffuser
Use:	Hotel, Household, PROFESSIONAL
Voltage:	220V 50HZ
Rated Power:	1300W
Function:	2 Speed Settings
Color:	Customized
Dimension:	210*182*100mm
Certificate:	CE ROHS CCC
Motor:	Professional Long Life AC Motor
Plug:	Standard

HR-201B



Material:	Plastic, ABS Plastic
Nozzle Type:	Diffuser
Use:	Hotel, Household, PROFESSIONAL
Voltage:	220V 50HZ
Rated Power:	1300W
Function:	2 Speed Settings
Color:	Customized
Dimension:	210*182*100mm
Certificate:	CE ROHS CCC
Motor:	Professional Long Life AC Motor
Plug:	Standard

HR-202



Voltage:	220V 50HZ
Rated Power:	1600W
Function:	Cool&Warm Air Settings
Color:	Customized
Material:	ABS Plastic, Plastic
Dimension:	220*90*170mm
Certificate:	CE ROHS CCC
Motor:	Professional Long Life AC Motor
Plug:	Standard
Use:	Hotel, Household, Professional
Nozzle Type:	Other

HR-203



Voltage :	220V 50HZ
Rated Power:	1300W
Function:	2 Speed Settings
Color:	Customized
Material:	ABS Plastic, Plastic
Dimension:	230*95*220mm
Certificate:	CE ROHS CCC
Motor:	Professional Long Life AC Motor
Plug:	Standard
Nozzle Type:	Diffuser
Use:	Hotel, Household, Professional

HR-204



Material:	ABS Plastic
Speed Settings:	2
Nozzle Type:	Diffuser
Use:	Hotel, Household, PROFESSIONAL
Power:	1300W
Voltage:	220V 50HZ
Color:	Customized
Dimension:	200*185*105mm
Certificate:	CE ROHS CCC
Motor:	Professional Long Life AC Motor
Plug:	Standard

HR-205



Material:	Plastic, ABS Plastic
Speed Settings:	2
Nozzle Type:	Concentrator
Feature:	Foldable, Foldable
Use:	Hotel, Household, Professional
Voltage:	220V 50HZ
Rated Power:	1600W
Color:	Customized
Certificate:	CE ROHS CCC
Motor:	Professional Long Life AC Motor
Plug:	Standard



Hand Dryers

HD-2000

Sensor:	Yes
Certification:	CE, RoHS
Voltage:	220V 50Hz
Rated Power:	2000W
Usage:	Public Places
Feature:	Sensor Jet Air Hand Dryer
Color:	White
Wind speed:	95m/s
Material:	ABS Plastic
Sensor Distance:	5~20cm
Water Splash Proof:	IPX1

HD-1400

Sensor:	Yes
Certification:	CE, RoHS
Voltage:	220V/50Hz
Rated Power:	1400W
Usage:	Public Places
Feature:	High-speed Cold Hot Wind Hand Dryer
Color:	White
Air speed:	95m/s
Material:	ABS Plastic
Sensor Distance:	5~20cm
Water Splash Proof:	IPX1

HD-1500

Sensor:	Yes
Certification:	CE, RoHS
Voltage:	220V/50Hz
Rated Power:	1400W
Usage:	Public Places
Feature:	High-speed Cold Hot Hand Dryer
Color:	White
Air speed:	75-100m/s(Adjustable)
Material:	ABS Plastic
Sensor Distance:	5~20cm
Water Splash Proof:	IPX1

HD-1200

Sensor:	Yes
Certification:	CE, EMC, RoHS
Voltage:	220V 50Hz
Rated Power:	1800W
Usage:	Public Places
Feature:	High-speed Cold Hot Wind Hand Dryer
Air speed:	16m/s
Material:	ABS
Sensor Distance:	5-20cm
Water Splash Proof:	IPX1
Use:	Hotel, Household, Professional
Nozzle Type:	Other

AIR PURIFIER PureBreathe700 PlasmaWave Technology



8 Stage Advance Purification, Energy-Efficient Design
Four-Color Digital Display, See the Real-time Indoor **Air Quality**

Low Energy Consumption 1kwh/10 nights
3 Years Warranty*



AIR QUALITY, REAL-TIME VISIBILITY, FOUR-COLOR DISPLAY, AT A GLANCE

Touch Design, Full Intelligent Automatic Purification,
Purifying More Than 5 Times Per Hour in 30m2 Space

Features:

- Remote Controller
- Intelligent Light Sensor
- Auto Mode/ Sleep Mode
- Touch Panel
- Child Lock
- PM2.5 Digital Display &
Real-time air quality visualisation
- Filter Replacement Alert
- Long Life Filter
- PlasmaWave Technology
- UV Sterilization

What you are breathing?



Vehicle Exhaust



Industrial Exhaust



Dust



Animal Hair



Secondhand Smoke



Kitchen Fume



Viruses & Bacteria



**Formaldehyde
and Benzene**

REAL TIME AIR QUALITY VISUALISATION

Indoor PM2.5 real-time display, intuitive monitoring and purification process.

Accurate monitoring of perceptual data

Built in particle sensor accurately perceiving data and monitoring air quality accurately.

The four color lamp is clear at a glance

Blue, green, purple and red air quality status lights are clear at all.



PM2.5 index
0-50 $\mu\text{g}/\text{m}^2$



PM2.5 index
51-100 $\mu\text{g}/\text{m}^2$



PM2.5 index
101-150 $\mu\text{g}/\text{m}^2$



PM2.5 index
>200 $\mu\text{g}/\text{m}^2$




Full Function Remote

Smart remote lets you easily manage your Air Purifier across the rooms.

SIX-LAYER PURIFICATION, MORE PROFESSIONAL AND EFFICIENT REMOVES FORMALDEHYDE, PM2.5, BACTERIA, DUST IN FEW MINUTES

The Layered Screen Is Closely Matched To Capture PM2.5, Temperature And Humidity, Etc.
Fine Particle Pollutants, Effectively Remove All Kinds Of Dust, Bacteria, Pollen, Benzene, Formaldehyde, Harmful Gases Such As Ammonia, Give You The Freshest And Healthiest Care

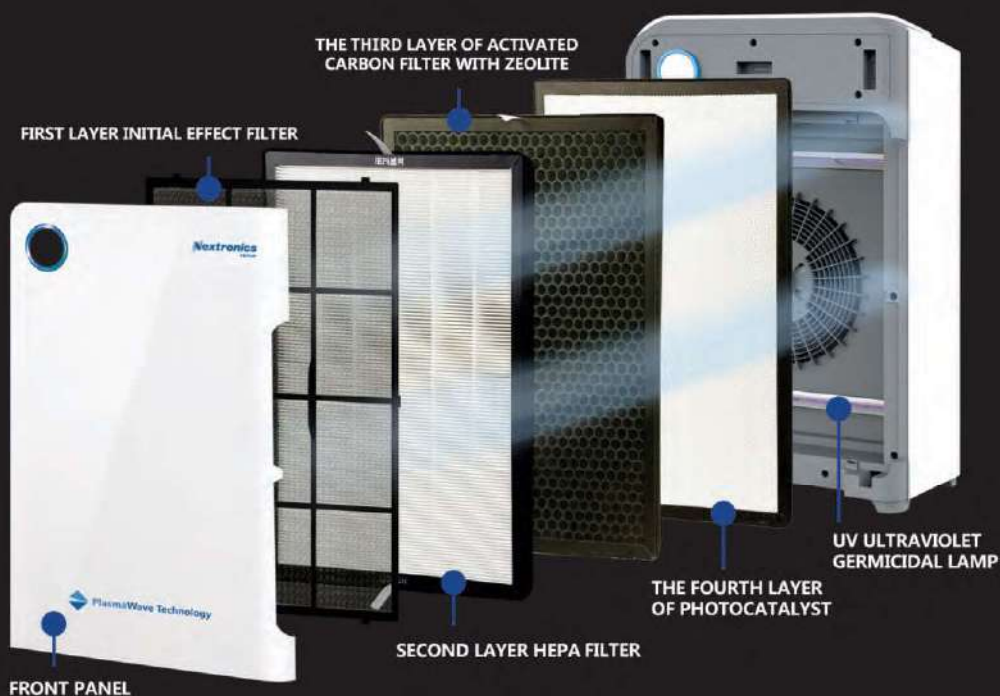

A VARIETY OF PURIFICATION MODES ARE THOUGHTFUL AND THOUGHTFUL.

Switch to purify mode to meet different purification needs.



1 / 4 / 8 hrs
off timer

Set 1 / 4 / 8 hrs
off timer simply by
pressing a single button



Mute Sleep
Sleep all night

Less than 20 decibels, so that it
can be quite when you rest.




Four speed
Fan Settings

to give you
ample choice in fan speed
apart of auto mode



Ultra Violet
Sterilization

Rapidly kills
viruses & bacteria



PlasmaWave
Technology

PlasmaWave Technology safely breaks
apart odours, allergens, chemical
vapours, and other pollutants at the
molecular level, without causing harmful
ozone. PlasmaWave creates positive
and negative ions that combine with
natural water vapor to form hydroxyls,
which cleans the indoor air.

PlasmaWave technology creates
negative and positive ions (no harmful
ozone) that combine with water vapour
molecules in the air to form hydroxyls
that neutralise harmful viruses, bacteria,
odour causing compounds and
importantly, VOCs and other chemical
vapours and gases – leaving only fresh
air. PlasmaWave neutralises 99.96%
influenza (flu) viruses within 60 mins.

Remote control has on/off for the
PlasmaWave feature.

Touch, easy to operate

100% small intelligence you can see




Filter update
indicator lamp

Automatically adjust the Light Intensity & Fan speed Low Noise, More Comfortable Unique Silent Mode, Guarantee Sleep Quality

The Unique Silent Mode, such as the calmness of the breeze, is almost impossible to feel it at work.




The lights dimmed automatically
Running noise $\leq 20\text{db}$

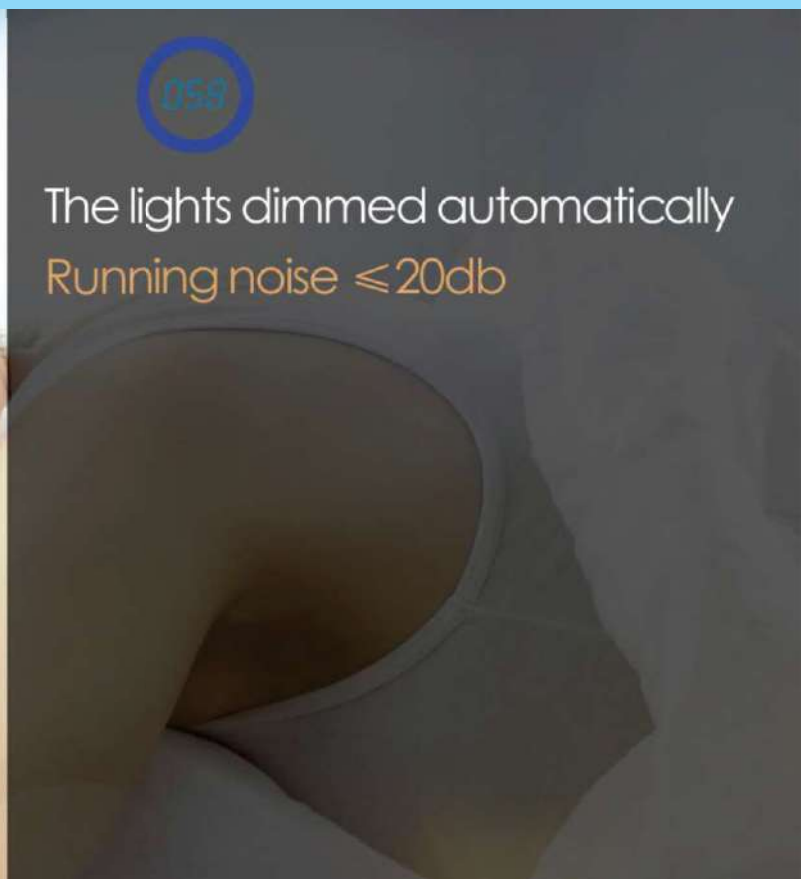



Multi-Scene Application Case

Light weight body with a Unique Silent Mode, suitable for use in limited spaces such as Bedrooms, Offices, Restaurants.

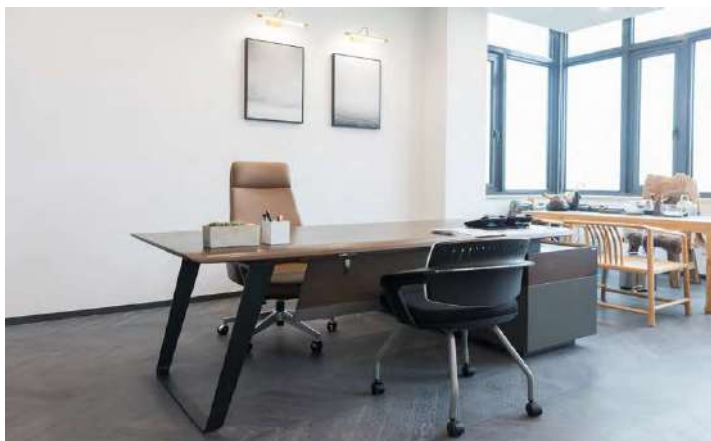

Specifications

Model: PB7OOP
Color: White
Rated power: 55W
Rated Voltage: 220-240V, 50Hz
Product size: 402*186*624(mm)
Carton size: 470*235*690(mm)
N/W: 8.6kg

G/W: 10.3kg
CADR: 340m³/h
Air Flow: 445m³/h
Noise: 60dB
Removal of formaldehyde: >98%
Removal of TVOC: >98%
Sterilization: >80%
Coverage Area: upto 700 sqft

Car Air Purifier



Air quality indicators

Different color indicate different air level

- Blue : air quality is excellent
- Light Purple : air quality is normal
- Deep purple : air quality is poor
- Twinkling Red : filter change alert

Specifications:

Product Size: 209*209*67mm

Rated Power: 9.5W/3.5W

Net Weight: 614.8g

Motor: Brush less DC Motor

Noise(Low speed): <30dB

Method of Cleaning: Pre-filter + HEPA filter + Activated Carbon

General Function: DC Motor +Dust sensor + Filter Replace Alert + Auto mode

Optional Features: 220V/50hz PLUG



Multi-effect filter



Filter Replace Reminder



Three Speed Mode

PureBreathe
PB110



Car Air Purifier



Air quality indicators

Different color indicate different air level

- Blue : air quality is excellent
- Light Purple : air quality is normal
- Deep purple : air quality is poor
- Twinkling Red : filter change alert

Specifications:

Product Size: 209*209*67mm

Rated Power: 9.5W/3.5W

Net Weight: 642g

Motor: Brush less DC Motor

Noise(Low speed): <30dB

Method of Cleaning: Pre-filter + HEPA filter + Activated Carbon

General Function: DC Motor +Dust sensor + Filter Replace Alert + Auto mode

Optional Features: 220V/50hz PLUG



Multi-effect filter



Filter Replace Reminder



Three Speed Mode

Nextronics

PureBreathe700P Airpurifier Comparison



Brand	Nextronics	Philips	Sharp
Model No.	PB700P	AC4372	FUA80EW
Digital Air Quality PM 2.5 Display	Yes	No	No
Four Stage Color Indicator	Yes	Yes	Three stage
Area Covered (Sq. Ft.)	700	753	650
Power Consumption (Max.)	55W, 1khW in 10 nights	63W	75W
Clean Air Delivery Rate (CADR)	340m3/h	341m3/h	300m3/h
UV Sterilization	Yes, Double UV light tube	No	No
Plasma Technology	PlasmaWave Technology	No	Plasma ion Cluster
Child Lock	Yes	Yes	Yes
Intelligent Light Sensor	Yes	Yes	No
Auto Mode/ Silent Mode	Yes	Yes	Auto Mode
Remote Control	Yes	No	No
Touch Panel	Yes	Yes	N/A
No. Of Filters	4	4	3
Pre-Filter	Yes	Yes	Yes
HEPA Filter	Yes	Yes	Yes
Activated Carbon Filter	Yes	Yes	Composite
Zeolite Filter	Yes	No	No
Photocatalyst Filter	Yes	No	No
Ozone Produces (Yes/No) 13	No	No	No
Effective Filtration size	0.02 microns	0.02 microns	0.02 microns
Filter Change alert	Yes	Yes	No
Max. Noise Level (db)	60	65	53
Min. Noise Level (db)	20	38	23
Cost Of Replacement Filter	Rs. 3,660	Rs. 9,352	Rs. 10,585
Product Dimension (mm)	402 x 186 x 624		402 x 245 x 620
Warranty (years)	3	2	
MRP (Rs.)	27810	49995	32000

Data source company's website

Nextronics

Change the tradition.....

Customer Care : +91-8750-100-700

Experience Centers

- A-06, Vasant Kunj Enclave,
Block A, New Delhi 110070
Tel.: 011 26899218
- Unit no. 312, 3rd Flr, Bldg 11, Motilal Nehru Nagar,
BKC, Bandra (E), Mumbai 400051
Tel.: 022 26533222
- No 48, 5th Main, 80ft Double Road,
Hegde Nagar, Bangalore - 560077
Tel.: 080 28444156

Nextronics Private Limited

1103, Tower 04, Paras Seasons, Sector 168, Noida 201301
Ph.: +91 120 4984 600, www.nextronics.in

Nextronics Pvt. Ltd. reserves the right to
change technical specifications without any prior notice.